


ARORA ULTRA SLIM LED PANELS

SLIM, STABLE, AND SAFE

Ultra slim and environmental friendly LED panels that offers stability, safety and reliable performance.

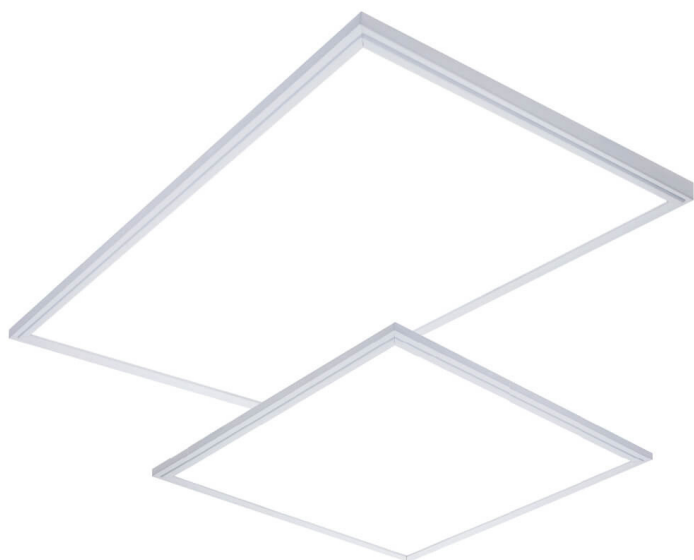

PN SERIES

Product Advantages

- Aluminum anodic oxidation
- Corrosion proof
- Ultra slim, 10mm thickness
- Environment friendly, no lead, mercury
- Stable, Safe, and Reliable performance
- Isolation protection

Specifications


Input Voltage	: 100-240VAC
PF	: >0.9
Beam Angle	: 20°
Color	: 3000-3500K/4000-4500K 5000-5500K/6000-6500K
CRI	: >80
IP	: IP20



ARORA ULTRA SLIM LED PANELS

TYPE POWER LUMEN

PN3030-18	18W	1500
PN3060-18	18W	1500
PN3060-36	36W	3000
PN6060-36	36W	2800
PN6060-48	48W	3800
PN6060-54	54W	4500
PN6060-72	72W	5500
PN6262-36	36W	2800
PN6262-48	48W	3800
PN6262-54	54W	4500
PN6262-72	72W	5500
PN30120-36	36W	2800
PN30120-48	48W	3800
PN30120-54	54W	4500
PN30120-72	72W	5500
PN60120-54	54W	4500
PN60120-72	72W	5500

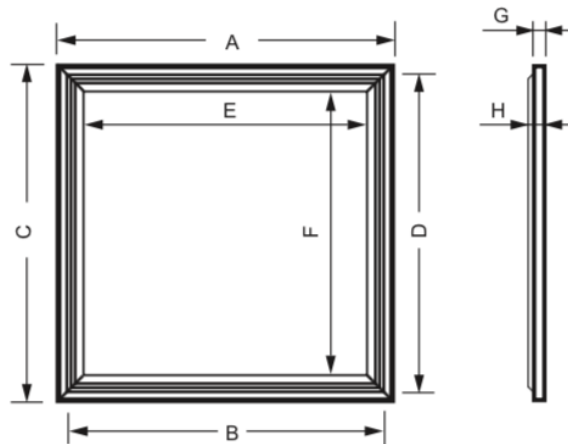

DIMENSIONS (MM)

MODEL	A	B	C	D	E	F	G	H
PN3030	295.0	282.2	295.0	282.2	250.0	250.0	9.0	10.0
PN3060	595.0	582.2	295.0	282.2	550.0	250.0	9.0	10.0
PN6060	595.0	582.2	595.0	582.2	550.0	550.0	9.0	10.0
PN6262	615.0	602.2	615.0	602.2	570.0	570.0	9.0	10.0
PN30120	1195.0	1182.2	295.0	282.2	1150.0	250.0	9.0	10.0
PN60120	1195.0	1182.2	595.0	582.2	1150.0	550.0	9.0	10.0

