


LTP

GALVANISED STEEL PVC COATED LIQUID TIGHT

MAIN FEATURES

- Galvanised steel, helically wound, flexible conduit with smooth oil resistant and high temperature pvc cover. Colour black. Grey or orange on request.
- Typical Applications Machine tools or outdoor installations where liquid tight is a requirement.
- High mechanical strength
- Good flexibility
- IP rating: IP66 + IP67+ IP68 (5 bar) + IP69
- Smooth wipe clean outer cover
- Cover does not wrinkle when bent
- Temperature range: LTP -20°C to +105°C
- LTP has Lloyds Register Type Approval
- Resistant to oils and greases
- UV resistant (black) and suitable for external use
- Nickel plated brass or stainless steel fittings

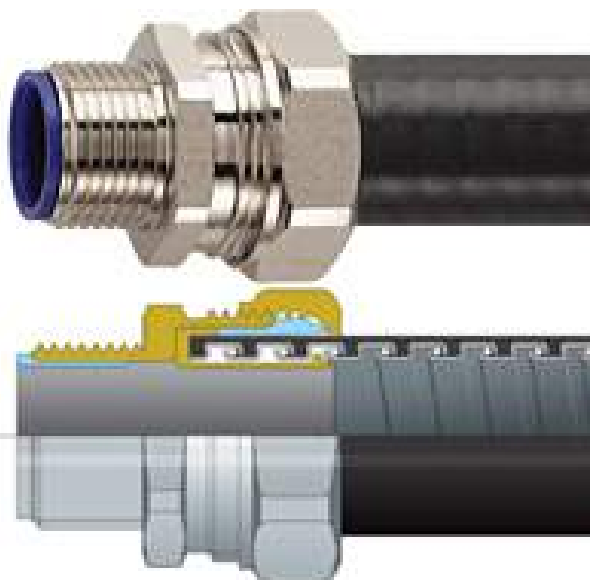

**product may change at any time without prior notice*



LTP TYPES LIST

TYPE	OUTSIDE DIA (MM)	INSIDE DIA (MM)	INSIDE BEND RADIUS (MM)
LTP10B	11.8	7.0	35
LTP12B	14.2	10.0	40
LTP16B	17.8	12.6	45
LTP20B	21.1	16.0	65
LTP25B	26.4	21.0	100
LTP32B	33.1	26.5	135
LTP40B	41.8	35.4	175
LTP50B	47.9	40.4	230
LTP63B	59.7	51.6	280

** product may change at any time without prior notice*