


KK Series

60w 80w 100w



120-degree beam angle, anti-glare glass, 25mm virtual depth of the housing, and patented reflector make this spot light strong and most efficient. The designer make this lamp from 60W 80W and 100W, and suitable for the application height of 5-7 meters, applied to Zone 1 & Zone 2, Zone 21 & Zone 22. Class IIA, IIB, IIC gas explosion environment. Temperature class T1-T5.

Lighting Distribution Curve

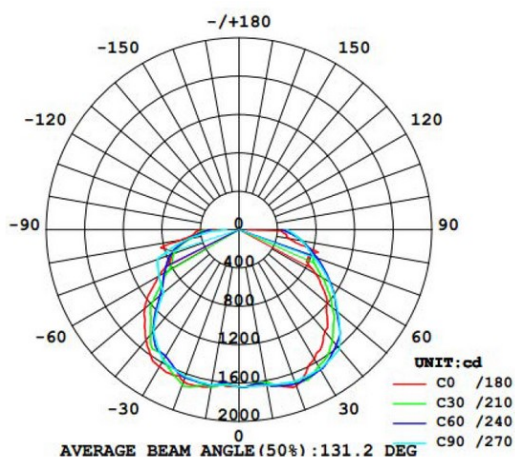

Protection Degree Ambient Temperature

IP66
60W & 70W (-30°C ~ +60°C);
80~100W (-30°C ~ +55°C)

Rules of Compliance

GB191-2008 GB2423.4-2008
GB3836.1-2010 GB3836.2-2010

Certificate

ATEX/PCEC/CE/RoHS

Body

Copper free cast aluminum

Paintings

External epoxy powders

Screws

External stainless steel

Cover

Tempered glass

Power

60W 80W 100W

Power Factor

0.98

Rated Voltage

90-264VAC

Lumen Efficiency

90lm/w

Color Temperature

2700-6500k

CRI

80

Measurement

50*320*300mm or
350*278*200mm


Weight

8.5KG


KK Series

60w 80w 100w


Mounting Type




(1) Ceiling Type




(2) Ceiling Type




(3) Wall Type

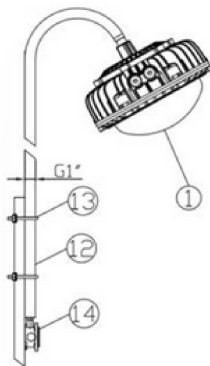


(5) Pole Type



(4) Pedant Pole Type



(6) Wall Type



(7) Wall Type

TYPE	WATT.
KK60	60
KK80	80
KK100	100